Alape

Technical factsheet



Washstand SET.WT.XS500H.L Sink-faucet-sets

Item Number: 0639001000

Characteristics

Model description Item Number Material basin

Coating

Type of flow

Flow rate max.

Dimensions Form Hole Overflow Net weight Note SET.WT.XS500H.L 0639001000 glazed steel white ProShield 110 mm

circular, air-enriched flow

160 mm 98 mm 32 mm 36 mm 5 l/min

2x screw-in M 10 x 1 pressure hose, leak-tested

w/h/d 500 mm/100 mm/268 mm

rectangular with one tap hole without overflow

5,55 kg

with single-lever basin mixer without pop-up waste

aerator adjustable -10° to +10°


Fittings information

Optimal impact on the basin mould with fittings that have a vertical outlet (90 $^{\circ}$ angle of impact) and a built-in aerator.

Impact area 85 mm - 120 mm from rear edge of basin



Flow rate chart

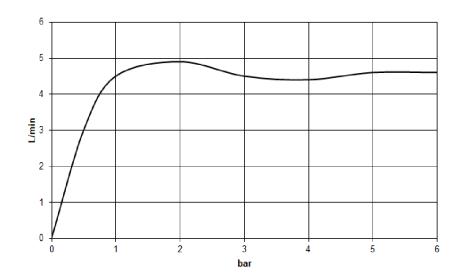

Product/tender specifications

Washstand SET.WT.XS500H.L Sink-faucet-sets

Item Number: 0639001000

Text

Alape

Washstand, rectangular, w/h/d 500/100/268 mm, glazed steel, white, ProShield, with one tap hole, without overflow, inklusive fixing set, drain valve, valve cap, white glazed, \emptyset 68 mm, with single-lever basin mixer without pop-up waste, Chrome, projection 110 mm, tap height 160 mm, height to aerator 98 mm, spout rigid, circular, air-enriched flow, aerator adjustable -10° to +10°, flow rate max. 5 l/min, 2x screw-in M 10 x 1 pressure hose, leak-tested, connection thread 3/8″, hole diameter 32 - 36 mm

We reserve the right to change designs, product range and technical specifications without prior notice. More information can be found at: www.alape.com +49 (0) 5321 558-0 info@alape.com

Date 29.04.2024