# **Alape**

## **Technical factsheet**



Washstand SET.WT.XS500H.L Sink-faucet-sets

Item Number: 0639002000

#### **Characteristics**

Model description Item Number Material basin

Coating

Type of flow

Flow rate max.

Dimensions Form Hole Overflow Net weight Note SET.WT.XS500H.L 0639002000 glazed steel white ProShield 110 mm

circular, air-enriched flow

160 mm 98 mm 32 mm 36 mm 5 l/min

2x screw-in M 10 x 1 pressure hose, leak-tested

w/h/d 500 mm/100 mm/268 mm

rectangular with one tap hole without overflow

5,55 kg

with single-lever basin mixer without pop-up waste

aerator adjustable -10° to +10°


#### Fittings information

Optimal impact on the basin mould with fittings that have a vertical outlet (90  $^\circ$  angle of impact) and a built-in aerator.

Impact area 85 mm - 120 mm from rear edge of basin



### Flow rate chart

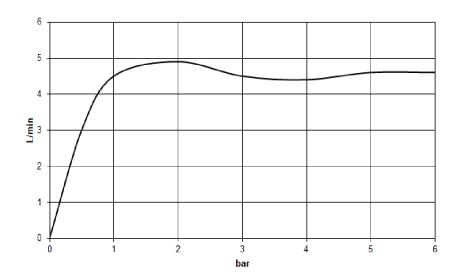

## **Product/tender specifications**

Washstand SET.WT.XS500H.L Sink-faucet-sets

Item Number: 0639002000

Text



Washstand, rectangular, w/h/d 500/100/268 mm, glazed steel, white, ProShield, with one tap hole, without overflow, inklusive fixing set, drain valve, valve cap, white glazed,  $\emptyset$  68 mm, with single-lever basin mixer without pop-up waste, Matt black, projection 110 mm, tap height 160 mm, height to aerator 98 mm, spout rigid, circular, air-enriched flow, aerator adjustable -10 $^{\circ}$  to +10 $^{\circ}$ , flow rate max. 5 l/min, 2x screw-in M 10 x 1 pressure hose, leak-tested, connection thread 3/8", hole diameter 32 - 36 mm

We reserve the right to change designs, product range and technical specifications without prior notice. More information can be found at: www.alape.com +49 (0) 5321 558-0 info@alape.com

Date 03.05.2024