

## Technical factsheet



**Washstand**  
**SET.WT.XS500H.L**

**Sink-faucet-sets**

Item Number: 0639002000

## Characteristics

Model description	SET.WT.XS500H.L
Item Number	0639002000
Material basin	glazed steel
	white
Coating	ProShield
	110 mm
Type of flow	circular, air-enriched flow
	160 mm
	98 mm
	32 mm
	36 mm
Flow rate max.	5 l/min
	2x screw-in M 10 x 1 pressure hose, leak-tested
Dimensions	w/h/d 500 mm/100 mm/268 mm
Form	rectangular
Hole	with one tap hole
Overflow	without overflow
Net weight	5,55 kg
Note	with single-lever basin mixer without pop-up waste aerator adjustable -10° to +10°


### Fittings information

Impact area 85 mm - 120 mm  
from rear edge of basin

Optimal impact on the basin mould with fittings that have a vertical outlet (90 ° angle of impact) and a built-in aerator.

## Flow rate chart

---

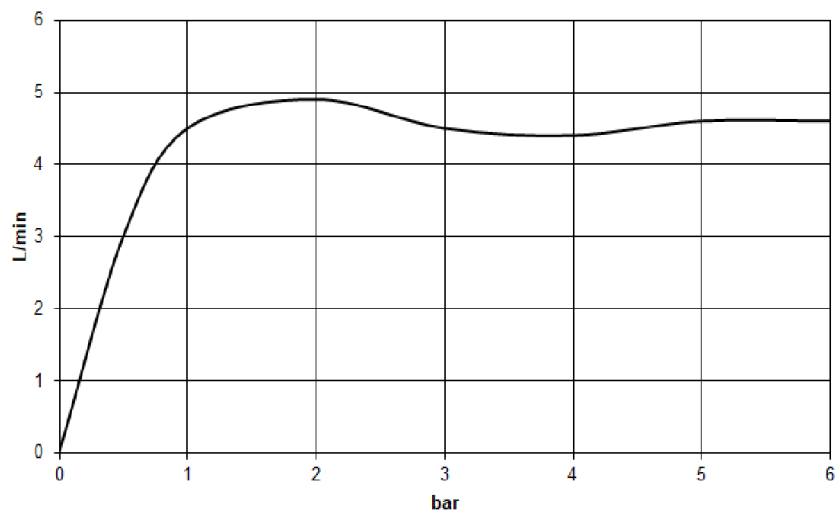

## Product/tender specifications

---

**Washstand**  
**SET.WT.XS500H.L**  
**Sink-faucet-sets**  
Item Number:

0639002000

### Text

Washstand, rectangular, w/h/d 500/100/268 mm, glazed steel, white, ProShield, with one tap hole, without overflow, inklusive fixing set, drain valve, valve cap, white glazed, Ø 68 mm, with single-lever basin mixer without pop-up waste, Matt black, projection 110 mm, tap height 160 mm, height to aerator 98 mm, spout rigid, circular, air-enriched flow, aerator adjustable -10° to +10°, flow rate max. 5 l/min, 2x screw-in M 10 x 1 pressure hose, leak-tested, connection thread 3/8", hole diameter 32 - 36 mm

---